


CHEM MM LUX[®]


Sightglass light fittings type: PEL / PL

The ideal solution for your light fittings problems
in hazardous as well as safe areas.

- Brilliant illumination due to high luminous power
- Fully developed package
- Various mounting options
- Highly competitive prices
- For combination of sight / light unit
as well as for separate fitting (2 port version)
- Also supplied complete with VETROLUX[®]
sightglasses

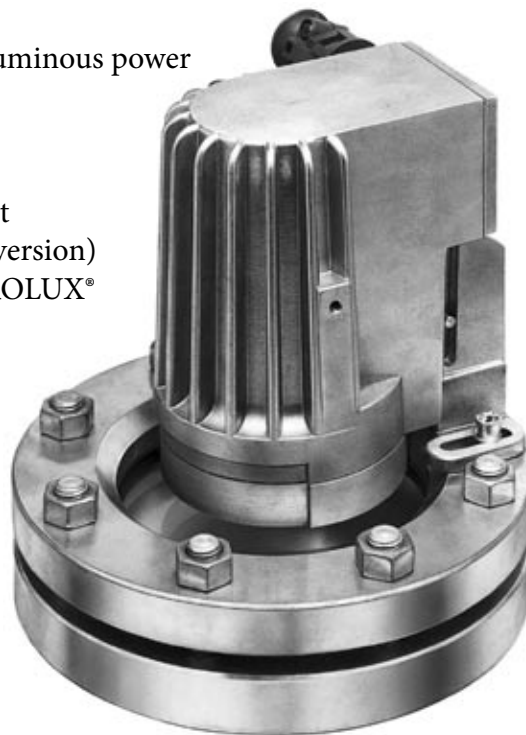

Type PEL 50 deHSch, EEx de IIC T4, Ex II 2 G + D, 230 V, 50 W, mounted on circular sightglass to DIN 28120, DN 125, PN 10, in 2 port version.

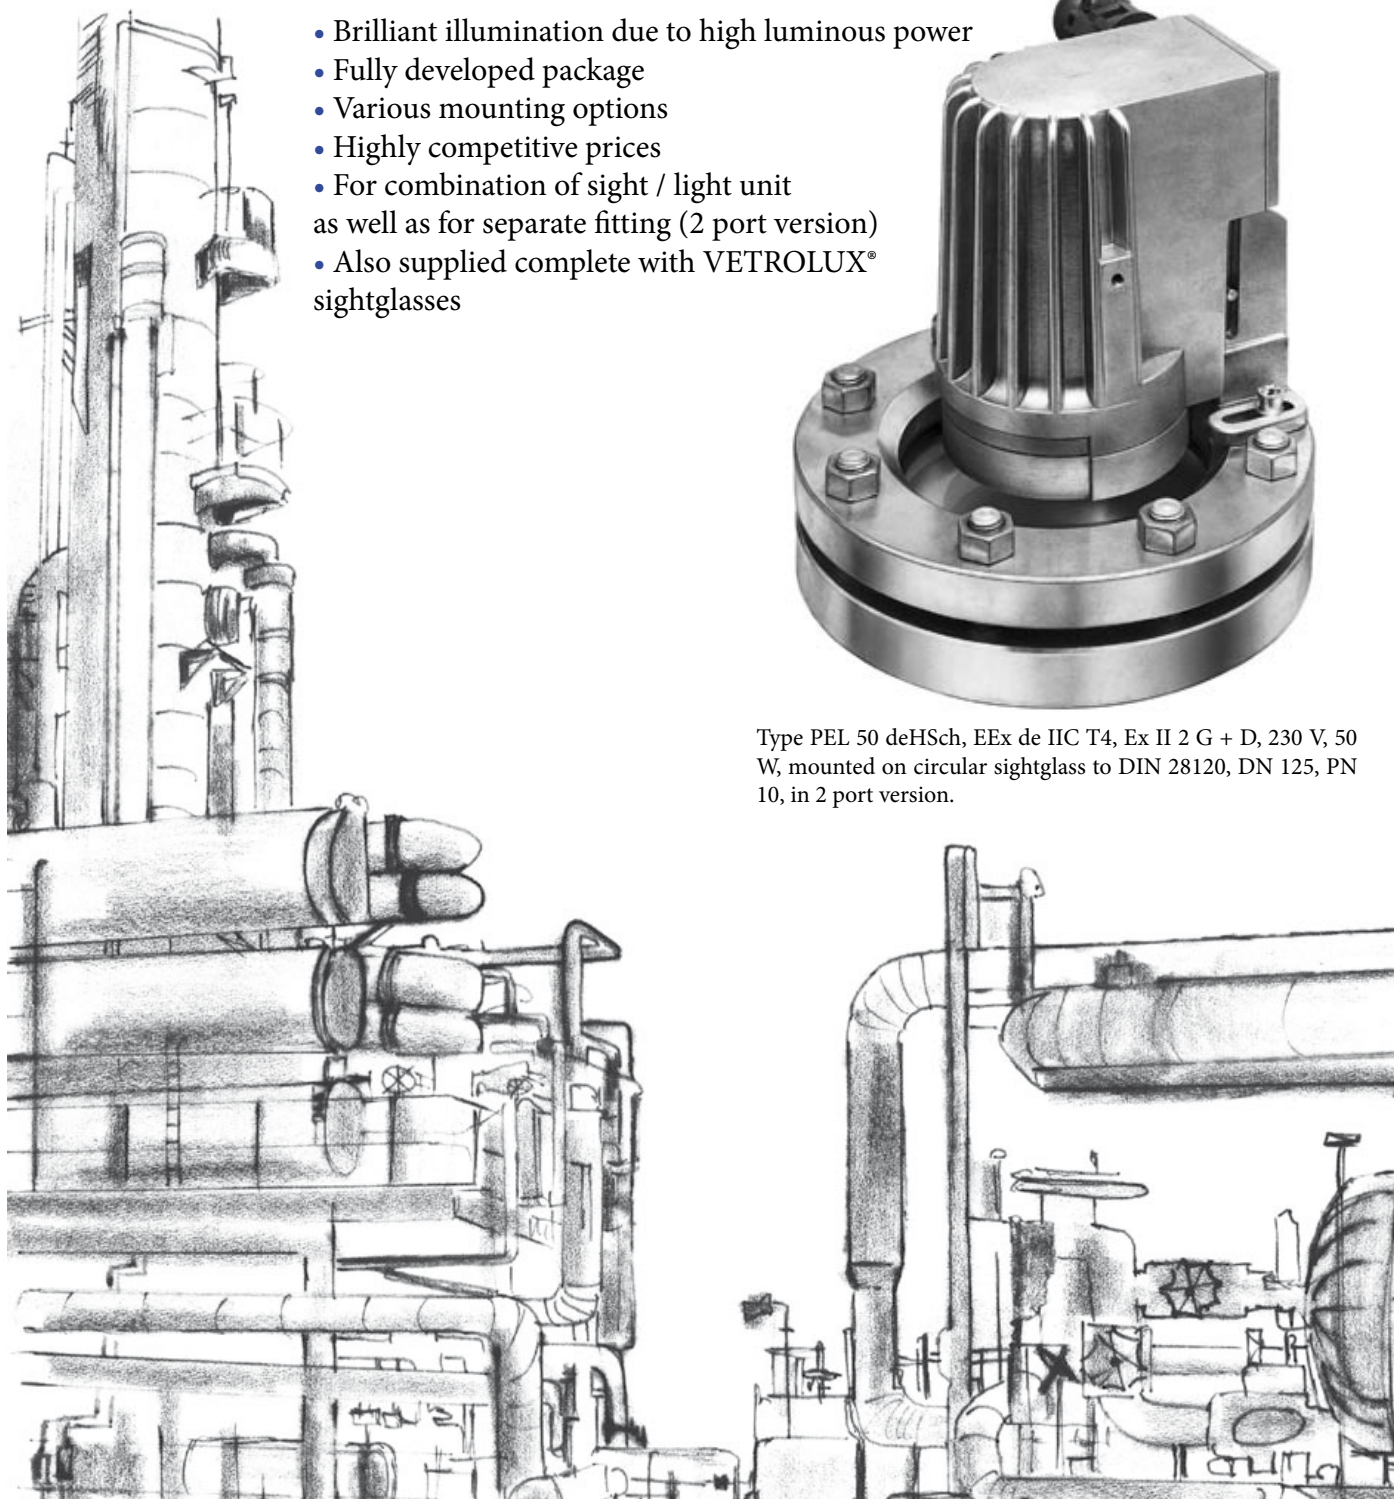

The sightglass light fittings of the series PEL/PL represent, due to our long experience of more than 40 years in this field, technically advanced top products, being thoroughly designed and manufactured according to the latest technical knowledge. They offer, besides the well-known quality and reliability of our products, the following principal advantages:

For the purchasing department:

- **Highly competitive prices** due to extremely compact value-engineered design and highly efficient manufacturing techniques.
- **Short** lead times.

For the design engineer or the plant engineer:

- Versatile design enabling the light fittings to be used as a combination "view and light through **one** assembly" already from DN 100 on depending on the type of the sightglass, as well as for use as a separate light fitting in a two port system.
- The light fittings for use in hazardous areas are certified to ATEX in the groups G (zones 1 and 2) and D (zones 21 and 22).
- Temperature classes until: **T6 (version 20 W)**, **T4 (version 50 W)**.
- **Easy installation** due to the availability of 3 different fixing systems (tilting hinge "Sch", flange collar "R", mounting feet "X1" / "X2"), meeting all applications on:
 - Circular sightglasses to DIN 28120 / 28121 or similar
 - Screwed sightglasses similar to DIN 11851
 - Pipeline flow indicators
- **Very compact** design.
- **Brilliant** illumination due to high wattage capability up to max. 100 Watt.
- **Different** terminal voltages possible (see following pages).
- **Dazzle free illumination** through anti-dazzle shield "B".
- Light units may be **installed in any position without restriction**.
- **Admitted** for food processing applications.
- **Particularly designed for extremely brilliant lighting** of vessels, reactors, tanks or silos.
- Optionally to be equipped with an electronic timer "V" / "U". The "V"-version permits action **on site** (on the light fitting) **and** on distance, the "U" version **on distance** only.
- **All models** may be equipped with a built-in device for momentary operation ("D"), the safe area types alternatively with built-in "ON - OFF" switch ("E").
- Available on request equipped **with transport handle** ("T"), thus serving as hand lamp.

For the maintenance electrician:

- **Easy replacement** of bulbs.
- **Halogen bulbs** are **industry standards** available from local suppliers.
- **Comfortable connection** due to largely dimensioned junction box.
- Only built-in **low voltage** halogen bulbs **with long lifetime**.

Operating conditions:

- Completely **independent** of vessel internal pressure or vacuum. However models with a built-in timer ("V" / "U") or "ON-OFF" switch ("E") or push-button ("D"), should be restricted to enclosure temperatures not exceeding 100 °C.

Electrical data:

- Supply: AC (DC **only** possible with 12/24 V terminal voltage)
- Terminal voltages: Refer to table on following pages for details

Enclosure protection degree:

- IP 65, dust and spray water tight

Constructions and materials:


- Housing and fixations "Sch", "X1" / "X2" of corrosion resistant cast aluminium alloy (Anticorodal). Upon request painted with a two component acryl based colour ("K"). Cable gland M 20 x 1.5 (explosion proof types), Pg 11 (safe area types). Connection to terminals up to 2.5 mm². Additional earth terminal 4 mm² external to the housing for hazardous area types. When timer "V" / "U" is included, an operating time of 3 minutes is preprogrammed at our factory. Various other operating times may be specified on ordering. With built-in transformers, the hazardous area models contain an integrated fuse. Reflector-bulb-units or bulbs according to your needs to produce a wide ("flood" version) or concentrated ("spot" version) beam of light. Standard version: "Spot". Sockets BA 15 d / GY 6.35/G4, depending on type.

| Type | Safe area light fittings | | PL20H | PL50H | PL100H |
|---|----------------------------|------|-------------------------------|-------------------------------|--------|
| | Hazardous area light fitt. | | PEL20deH | PEL50deH | |
| Nominal rating | (W) | | 20 | 50 | 100 |
| Terminal voltages with built-in transformer | (V) | | 24, 36 42, 115 230, 240 | 24, 36 42, 115 230, 240 | |
| Secondary voltages without built-in transformer | (V) | | 12 | 12 | |
| Terminal voltages without built-in transformer | (V) | | 12, 24 | 12, 24 | 12, 24 |
| Weight of light fitting | with transformer | (kg) | 3,60 | 3,60 | |
| | without tranformer | (kg) | 3,65 | 2,65 | 2,65 |

The lower indications are only valid for the hazardous area models:


| | | | | |
|--|--------------------|-----------------------|------------------------|--|
| Ignition protection type to DIN EN 50014 / 50018 / 50019 | | EEx de | EEx de | |
| Explosion group | | IIC | IIC | |
| Temperat. class | with tranformer | T4 / T6 | T3 / T4 | |
| | withou transformer | T5 / T6 | | |
| ATEX | Ex II 2 G+D | T 130 °C / T 80 °C | T 195 °C / T 130 °C | |
| | | T 95 °C / T 80 °C | | |
| | | | | |

* Weight of fixations: "Sch" 0.3 kg, "X1" / "X2": 0.2 kg




Opal glass screen . . . M

In the case of pipeline flow indicator application, a strong blinding effect occurs when the unit is mounted as usual. This blinding effect is avoided by an opal glass screen creating a much higher light dispersion as compared to that of the standard "spot" or "flood" types.




Device for momentary illumination . . . D

In order to avoid unnecessary continuous operation and thus prolong the lifetime of the bulb, the light fitting may be equipped with a built-in device for momentary operation. The latter cannot be combined with the timer . . . V or . . . U. (Refer to separate leaflet "Switches, push-buttons and timers").




Electronic timer . . . V / U

The timers for command on the unit (. . . V) or at distance (. . . U) considerably save energy and increase the lifetime of the bulb, limiting the function of the unit to approximately 3 minutes. They are especially recommended for short or even sporadic observation of the vessel contents. Expensive primary time relays are no more necessary. The timers cannot be combined with the device . . . D. (Refer to separate leaflet "Switches, push-buttons and timers").



Transport handle . . . T

An ergonomic and insulated handle facilitates the transport within the factory. This handle also renders the light fitting portable, e.g. for use for inspections inside vessels.



Paint finish . . . K

The special two component acrylic paint finish protects against corrosion in excessively aggressive environments, and may satisfy customers special aesthetic requirements. RAL 9001 is standard, other colours on demand.

The following tables show the mounting possibilities on circular sight-glasses to or similar to DIN 28120 / 28121 and similar to DIN 11851:

On circular sightglasses to DIN 28120 in 2 port version (light and sightglass separated):

| DN | 50 | 80 | 100 | 125 | 150 | 200 |
|----------|----|----|-----|-----|-----|-----|
| Fixation | | | | | | |
| Sch | | | | ⊙ | • | • |
| X1 | | • | • | • | • | |
| X2 | | | | | | |

On circular sightglasses to DIN 28120 in 1 port version (light and sightglass):

| DN | 50 | 80 | 100 | 125 | 150 | 200 |
|----------|----|----|-----|-----|-----|-----|
| Fixation | | | | | | |
| Sch | | | | | | ⊙ |
| X1 | | | • | • | • | |
| X2 | | | | ⊙ | ⊙ | • |

On circular sightglasses to DIN 28121 in 2 port version (light and sightglass separated):

| DN | 50 | 80 | 100 | 125 | 150 | 200 |
|----------|----|----|-----|-----|-----|-----|
| Fixation | | | | | | |
| Sch | | | | | ⊙ | ⊙ |
| X1 | • | • | • | • | • | • |
| X2 | | | | | | |

On circular sightglasses to DIN 28121 in 1 port version (light and sightglass):

| DN | 50 | 80 | 100 | 125 | 150 | 200 |
|----------|----|----|-----|-----|-----|-----|
| Fixation | | | | | | |
| Sch | | | | | | |
| X1 | | | | • | • | • |
| X2 | | | | | | |

On circular sightglasses similar to DIN 11851 in 2 port version (light and sightglass separated):


| DN | 80 | 100 | 125 | 150 |
|----------|----|-----|-----|-----|
| Fixation | | | | |
| R | • | • | • | |
| X1 | | | | • |

⊙ Prefer these mounting possibilities

For the mounting on flow indicators as well as on nonstandardized sightglasses please contact us so we may submit you our proposals. In case of order please specify the desired fixation. Attention: The anti-dazzle shield "B" has always to be ordered separately together with the fixations "X1" or "X2" if the light fitting is foreseen to be mounted in the 1 port version.




Type PEL 50 deH X2 B, 230 V, 50 W, EEx de IIC T4, Ex II 2 G+D, with anti-dazzle shield "B", on circular sightglass to DIN 28120, DN 150, PN 10, in version "view and light trough one assembly"



Fixation "X1"


| A | B | C | D | E |
|-----|-----|-----|-----|----|
| 161 | 146 | 108 | 186 | 28 |

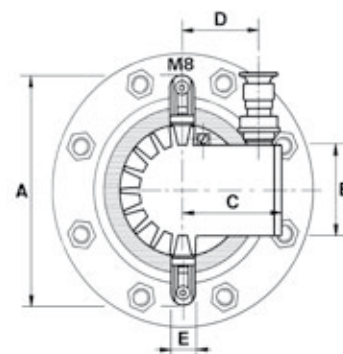

| A | B | C | D | E |
|-----|----|----|----|----|
| 209 | 82 | 96 | 74 | 23 |




Type PL 100 HR80, 24 V, 100 W, on screwed sightglass similar to DIN 11851, DN 80, PN 6. Fixation with intermediate flange collar "R"



Fixation "X2"


| A | B | C | D | E |
|-----|-----|----|----|----|
| 183 | 156 | 63 | 20 | 28 |

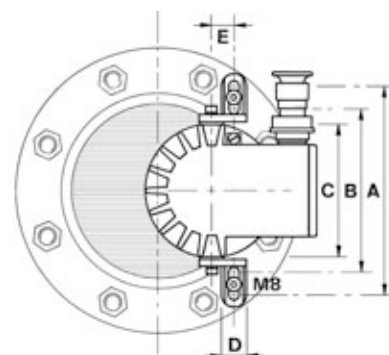

| A | B | C | D | E |
|-----|-----|-----|----|----|
| 186 | 146 | 116 | 23 | 20 |




Type PEL 20 deH Sch, 230 V, 20 W, EEx de IIC T6, Ex II 2 G + D, mounted on circular sightglass to DIN 28120, DN 125, PN 10, in 1 port version



Fixation "Sch"

| A | B | C | D | E |
|-----|-----|-----|----|----|
| 183 | 172 | 107 | 70 | 30 |

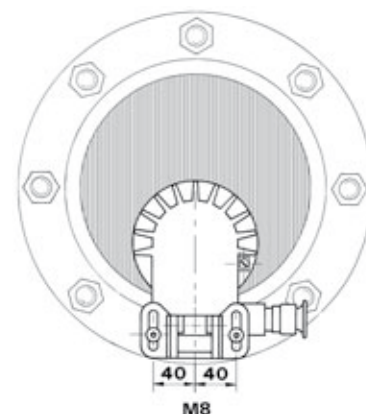

Do you wish for more information about our wide range of light fittings for use in hazardous or safe areas, about our range of circular sightglasses to DIN 28120/28121, screwed sightglasses similar to DIN 11851, rectangular or D-ended sightglasses, pipeline flow indicators, sideways or centrally operated wipers, hinged sightglasses, spraying devices or our complete sight and lightglass units VETROLUX®? Are you interested in other types, special versions or different protection degrees? If yes, please contact us – it is our business! You will find the necessary indications about our company on the Internet.

- 1) All dimensions in mm.
- 2) Subject to changes without preliminary notice.