

# WAFER BUTTERFLY VALVE MODEL 1123



Size:	DN 32/40 to DN 1200
Ends:	Between flanges PN 10/16, Class 150 up to DN 600
Min Temperature:	-10 °C
Max temperature:	+110°C (130°C temporarily)
Max pressure:	16 Bars up to DN 300
Specifications:	Long neck for isolation Stainless steel disc Vulcanised EPDM seat
Materials :	Cast iron body

# WAFER BUTTERFLY VALVE MODEL 1123

## SPECIFICATIONS:

- Long neck for isolation
- ISO 5211 mounting pad
- Wafer type
- Between flanges PN 10/16 from DN 32 to DN 600 and Class 150 (PN 20) from DN 40 to DN 600
- Between flanges PN 10 from DN 700 to DN 1200
- Full crossing stem up to DN 600
- With 10 positions lever and locking device up to DN 150
- Double PTFE seal on stem up to DN 600
- Stainless steel disc
- Epoxy painting RAL003 80 microns thickness
- Vulcanised EPDM seat

## USE :

- Cold and hot water, sea water, demineralized water, alcohol, milk of lime, mercury, alcalins, hydroxid of soda
- Min and max Temperature Ts : - 10 °C to + 110 °C (130°C temporarily)
- Max Pressure Ps : 16 bars up to DN 300, 10 bars over

## FLOW COEFFICIENT K<sub>v</sub> (M<sup>3</sup> / h):

DN	32/40	50	65	80	100	125	150	200	250	300	350	400	450	500	600	
Opening angle	10°	0,04	0,05	0,09	0,17	0,26	0,43	0,68	1,7	2,6	3,4	5,1	6,8	9,4	11,9	18,8
	20°	2	3	5	8	15 2	5	38 7	6	129	200	288	396	525	675	1042
	30°	5	6	10 1	5	31 5	2	81	160	273	422	610	839	1101	1428	2207
	40°	10 1	3	21 3	3	67	113	175	348	592	914	1321	1817	2407	3095	4781
	50°	18 2	3	38 6	0	119	202	312	620	1055	1630	2355	3239	4289	5515	8521
	60°	30 3	8	64 9	9	196	334	516	1025	1746	2697	3897	5359	7097	9125	14098
	70°	48 6	0	102	156	310	529	817	1623	2764	4269	6167	8481	11232	14442	22312
	80°	72 9	0	152	235	466	793	1226	2434	4145	6403	9250	12720	16848	21662	33468
	90°	78 9	8	167	258	512	872	1347	2675	4555	7037	10165	13799	18514	23805	36778

DN	700	800	900	1000	1200	
Opening angle	10°	31 3	9	52 7	2	104
	20°	1568	2064	2612	3617	5172
	30°	3147	4143	5243	7260	10379
	40°	5739	7555	9561	13238	18932
	50°	8648	11925	15091	20894	29879
	60°	12929	17827	22561	31279	44730
	70°	19692	27153	34362	47641	68126
	80°	30182	41615	52667	73017	104415
	90°	42811	59028	57406	103569	148105

# WAFER BUTTERFLY VALVE MODEL 1123

## TORQUE VALUE (Nm, without safety coefficient):


We recommend a safety coefficient of 30% minimum to determinate the actuator.

DN	32/40	50	65	80	100	125	150	200	250	300	350	400	450	500	600	700	800	900	1000	1200
PN10	11 1	5	24 3	1	48 7	3	106	177	281	410	475	746	1112	1356	2468	4908	6462	7886	13389	18833
PN16	12 1	6	26 3	3	53 8	1	119	194	308	441	-	-	-	-	-	-	-	-	-	-

## RANGE:

- With lever from DN 32/40 to DN 300
- With gear box from DN 350 to DN 1200
- Gear box possible from DN 32/40 to DN 300 Ref. 1198


## Materials: DN 32/40 - 300

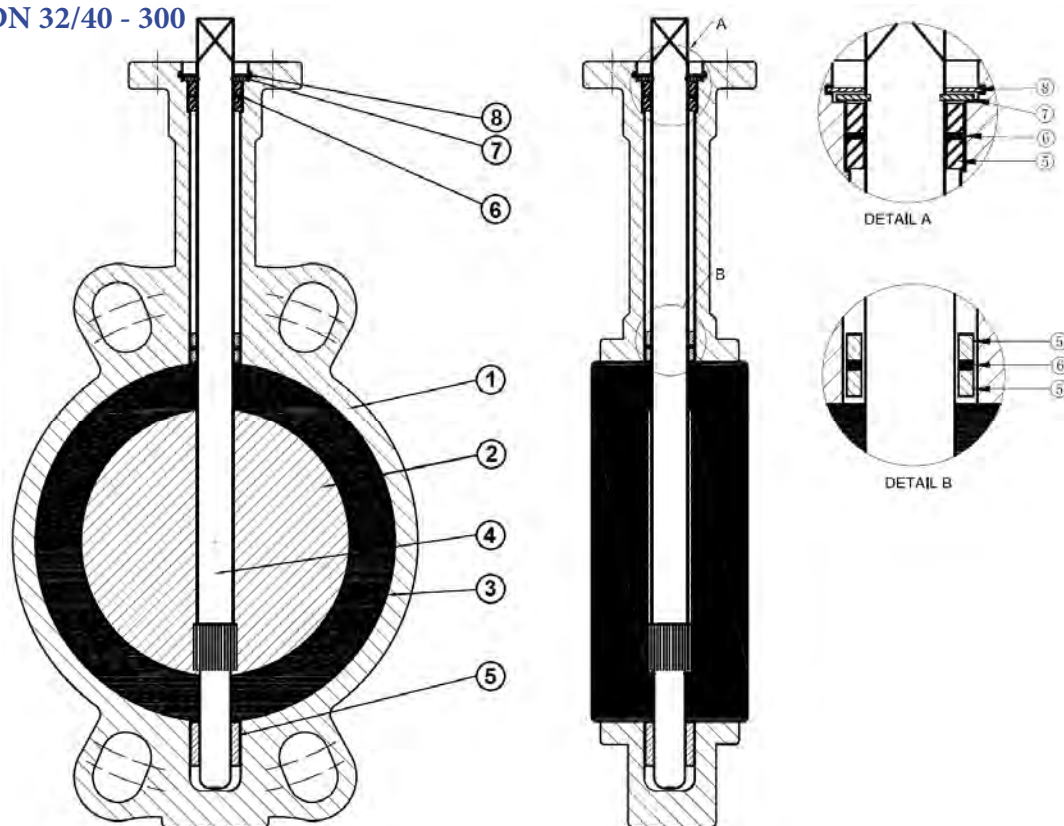

Item	Designation	Materials
1	Body	Cast iron EN GJL-250
2	Disc	ASTM A351 CF8M
3	Elastic ring	EPDM
4	Stem	SS 416
5	Bushing	PTFE
6	O ring	EPDM
7	Circlip	Steel
8	Circlip	Steel
	Lever	Aluminium

# WAFER BUTTERFLY VALVE MODEL 1123


Materials: DN 350

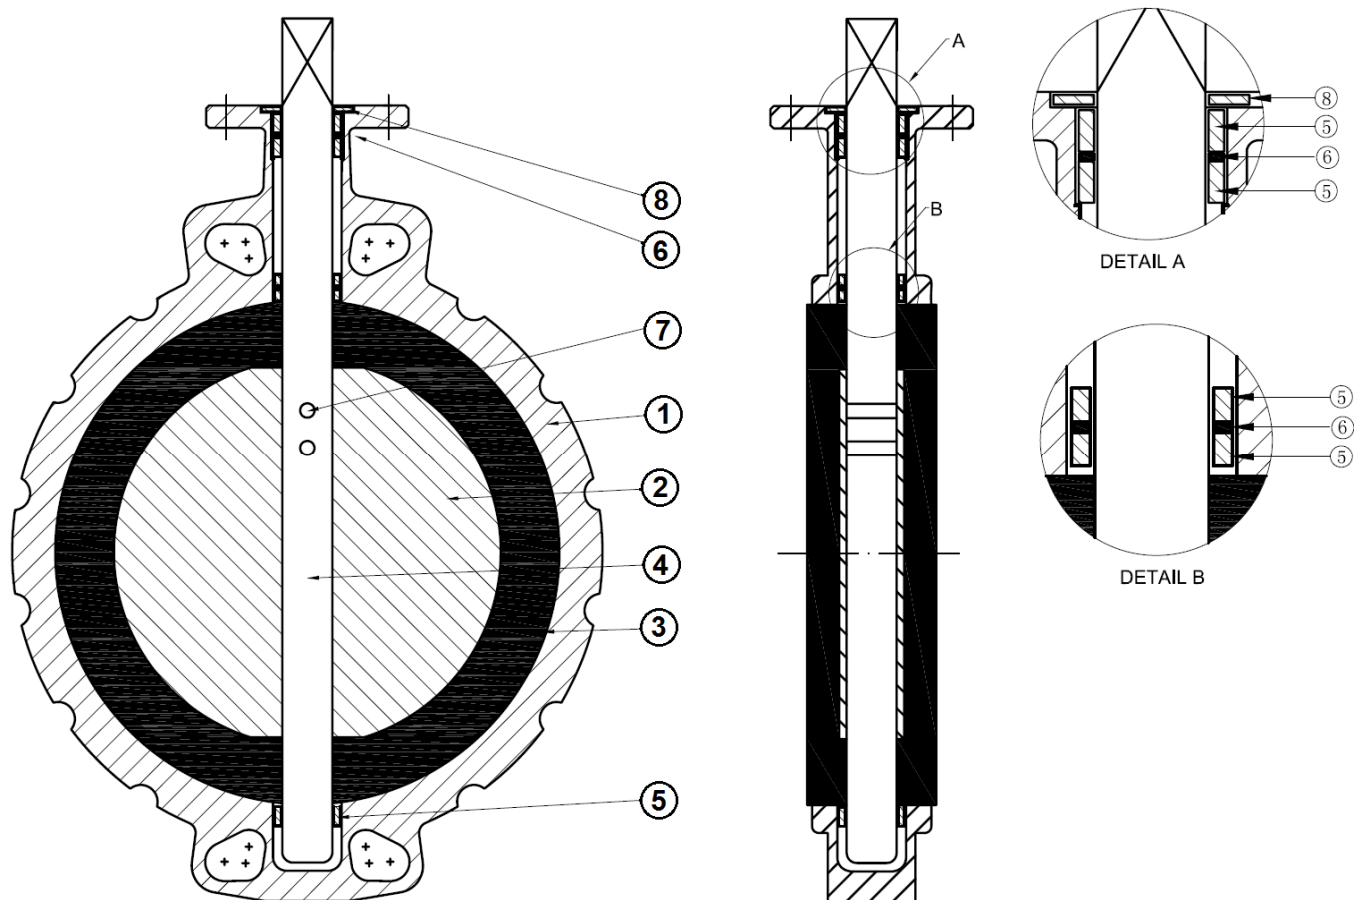

Item	Designation	Materials
1	Body	Cast iron EN GJL-250
2	Disc	ASTM A351 CF8M
3	Elastic ring	EPDM
4	Stem	SS 431
5	Bushing	PTFE
6	O ring	EPDM
7	Pin	SS 316
8	Gasket	EPDM

# WAFER BUTTERFLY VALVE MODEL 1123


Materials: DN 400 - 600

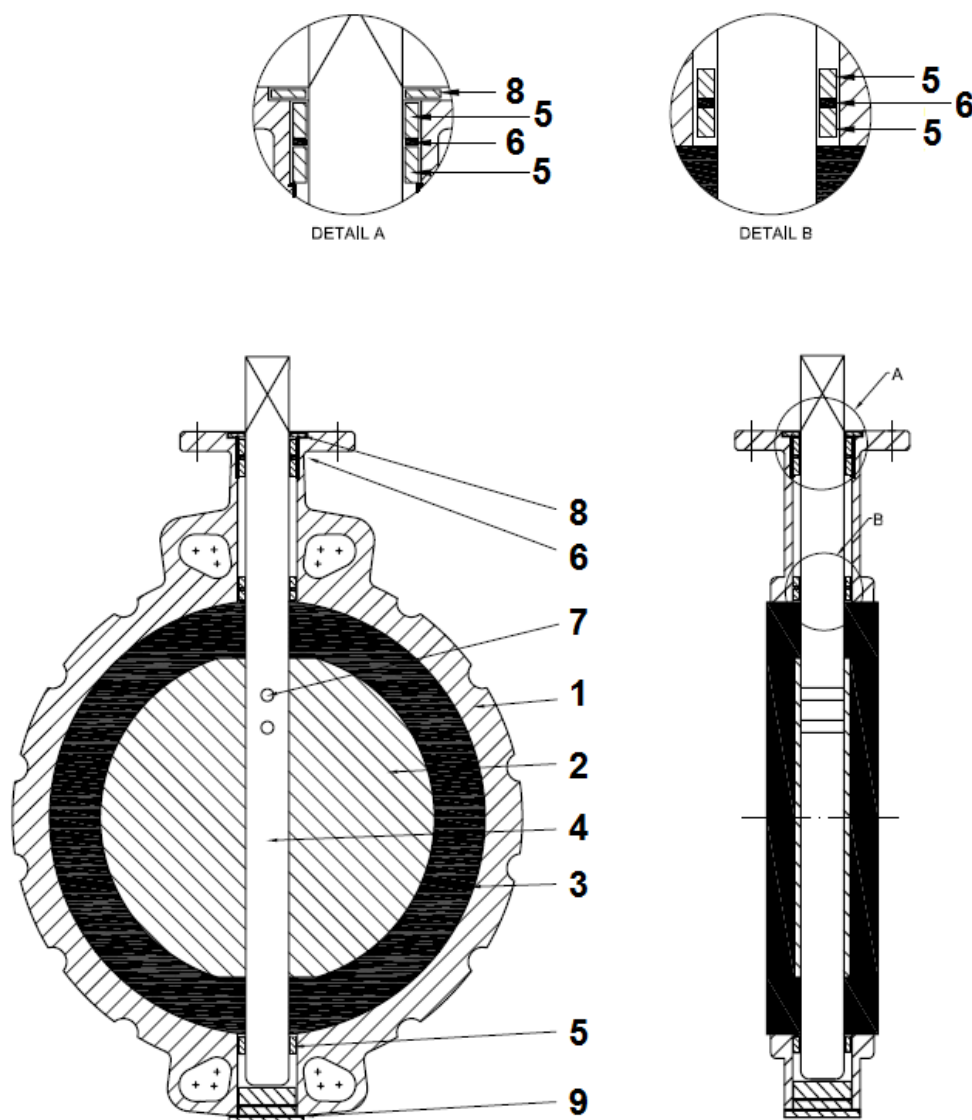

Item	Designation	Materials
1	Body	Cast iron EN GJL-250
2	Disc	ASTM A351 CF8M
3	Elastic ring	EPDM
4	Stem	SS 431
5	Bushing	PTFE
6	O ring	EPDM
7	Pin	SS 316
8	Gasket	EPDM
9	Gasket	EPDM

# WAFER BUTTERFLY VALVE MODEL 1123


Materials: DN 700 - 1200

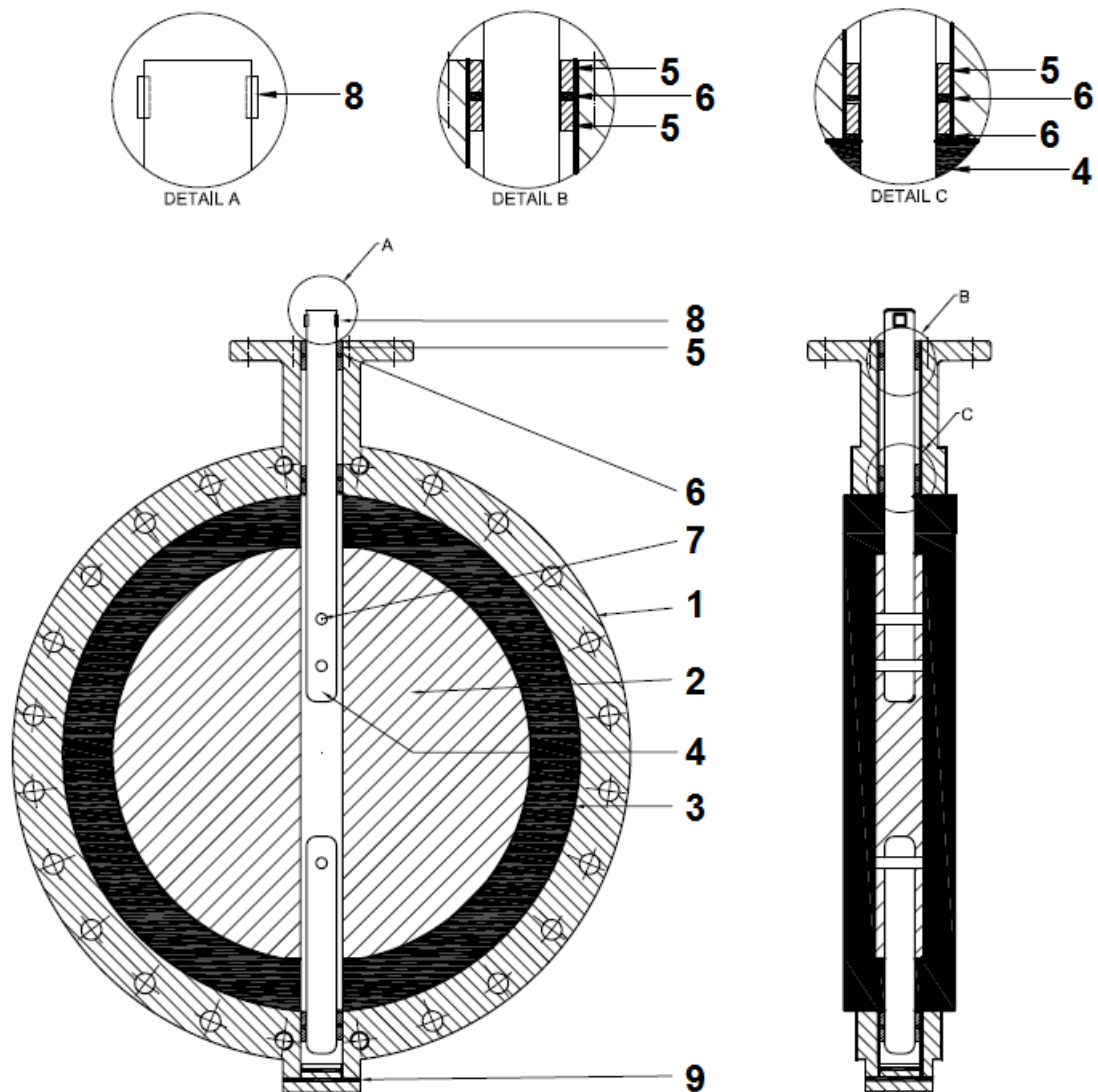

Item	Designation	Materials
1	Body	Cast iron EN GJL-250
2	Disc	ASTM A351 CF8M
3	Elastic ring	EPDM
4	Stem	SS 431
5	Bushing	Aluminium + Bronze
6	O ring	EPDM
7	Pin	SS 316
8	Pin	SQ 719
9	Gasket	EPDM

# WAFER BUTTERFLY VALVE MODEL 1123


Materials Gearbox: DN 40 - 450

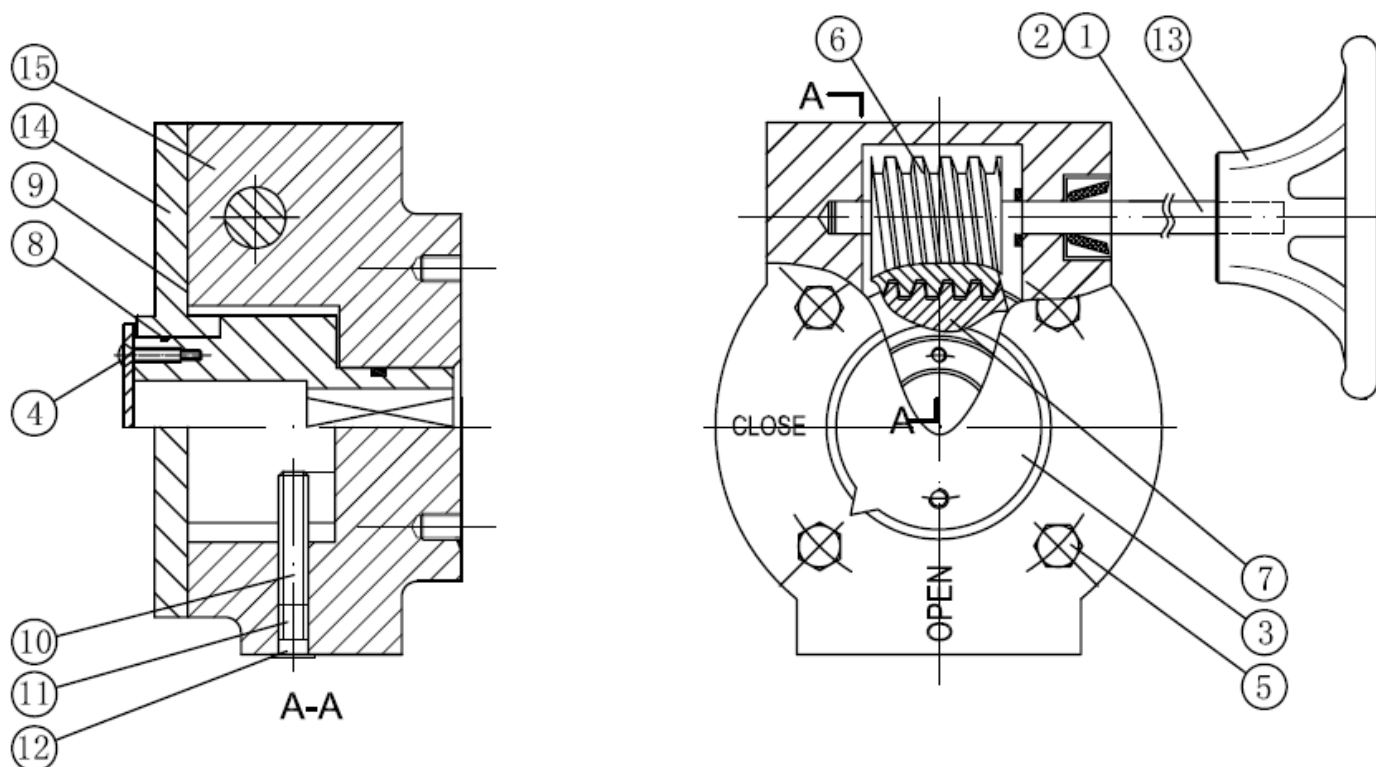

Item	Designation	Materials
1	Stem	Chromed steel
2	Pin	SS 316
3	Indicator plate	Aluminium + NBR gasket
4	Indicator bolt, washer	SS 316
5	Bolt, washer	SS 316
6	Gear 1	Steel
7	Gear 2	Ductile iron EN GJS-400-15
8	O ring	NBR
9	Bonnet gasket	NBR
10	Internal set screw	Carbon steel
11	External set screw	SS 316
12	Plastic cap	Plastic
13	Handwheel	Cast iron EN GJL-250 epoxy coating
14	Bonnet	Cast iron EN GJL-250 epoxy coating
15 B	Body	Cast iron EN GJL-250 epoxy coating
	Bolting to fix on valve	SS 304

# WAFER BUTTERFLY VALVE MODEL 1123

Materials Gearbox: DN 500 - 600

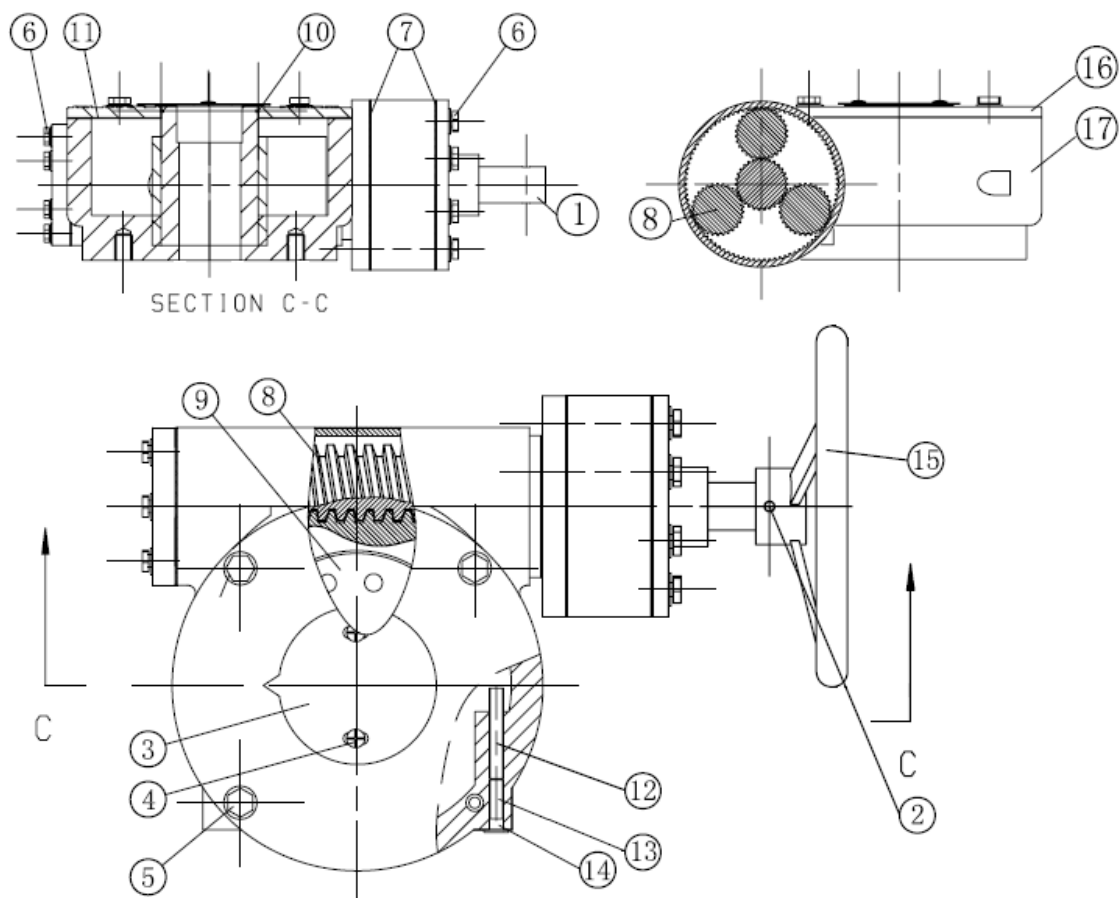


Item	Designation	Materials
1	Stem	Chromed steel
2	Pin	SS 316
3	Indicator plate A	luminium + NBR
4	Indicator bolt, washer	SS 316
5	Bolt, washer	SS 316
6	Bolting	SS 316
7	Body gasket	NBR
8	Gear 1	Steel
9	Gear 2	Ductile iron EN GJS-400-15
10	O ring	NBR
11	Bonnet gasket	NBR
12	Internal set screw	Acier
13	External set screw	SS 316
14	Cap	Plastic
15	Handwheel	Cast iron EN GJL-250 epoxy coating
16	Bonnet	Cast iron EN GJL-250 epoxy coating
17 B	Body	Cast iron EN GJL-250 epoxy coating
	Bolting to fix on valve	SS 304



# WAFER BUTTERFLY VALVE MODEL 1123


Materials Gearbox: DN 700 - 1200

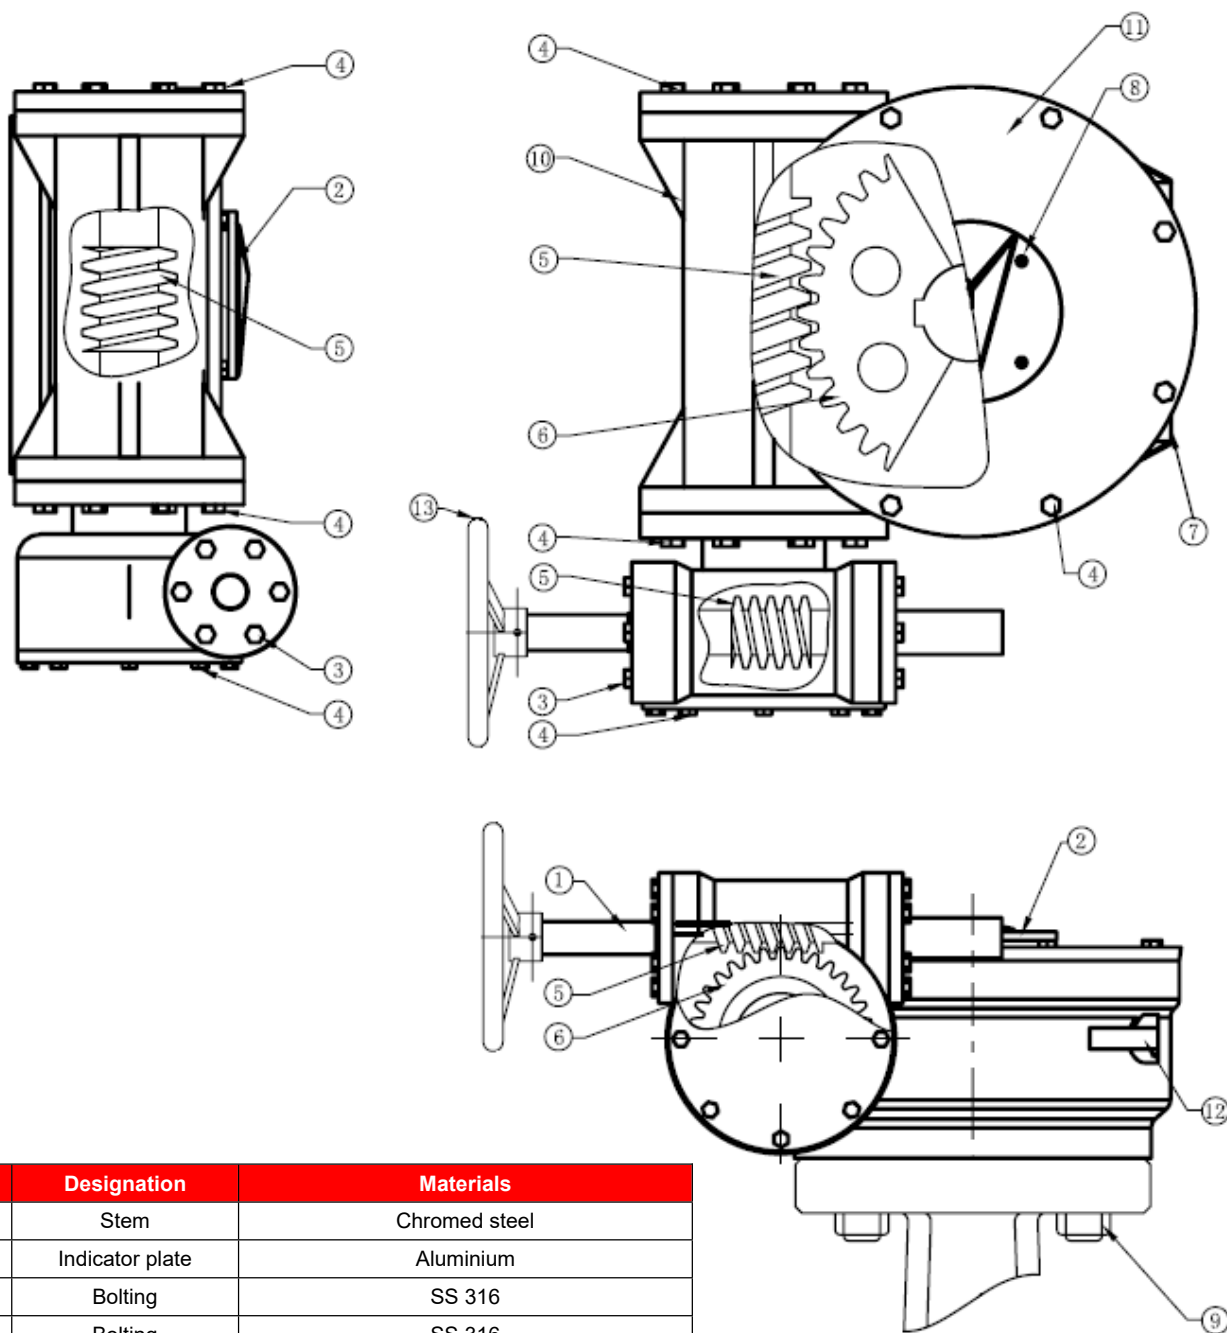

Item	Designation	Materials
1	Stem	Chromed steel
2	Indicator plate	Aluminium
3	Bolting	SS 316
4	Bolting	SS 316
5	Gear 1	Steel
6	Gear 2	Ductile iron EN GJS-400-15
7	External set screw	SS 316
8	Screw	SS 316
9	Bolting	SS 304
10 B	Body	Cast iron EN GJL-250 epoxy coating
11	Bonnet	Cast iron EN GJL-250 epoxy coating
12	Internal set screw	Steel
13	Handwheel	Ductile iron EN GJS-400-15 epoxy coating

# WAFER BUTTERFLY VALVE MODEL 1123


Valve size: DN 32/40 - 300

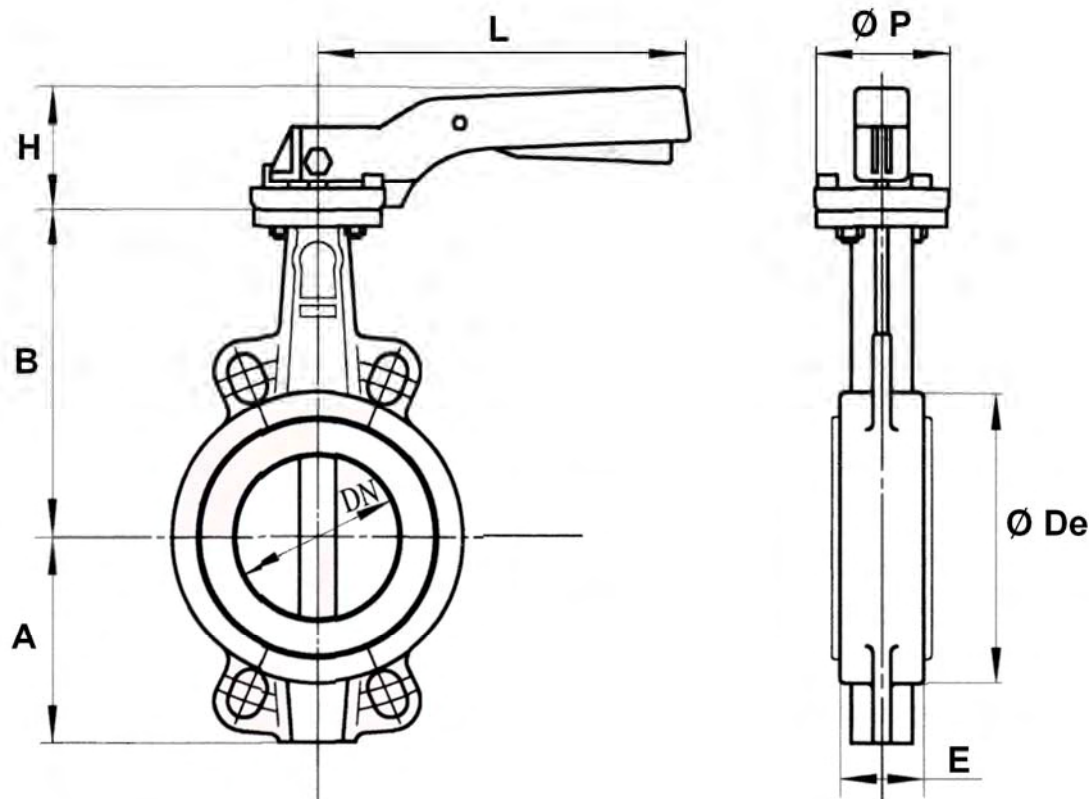

Ref.	DN	32/40	50	65	80	100	125	150	200	250	300
1123	A	61.7	7	87,5.9	5	107	121,5	144	171	205	235
	B	130	136,5	142	158	180	192	215	242	280	310
	Ř De	82.9	5	109	127	152	180	207	260	315	370
	E	33.4	3	46.4	6	52.5	6	56.6	0	68	78
	H	70.7	0	70.7	0	70.7	1	71.4	0	44	44
	L	195	195	195	195	195	278	278	355	507	507
	Ř P	65.6	5	65.6	5	65.9	0	90	125	150	150
	Weig. (Kg)	1.85	2.53	2.86	3.16	4.21	6.67	7.66	14.67	23.4	33.8

# WAFER BUTTERFLY VALVE MODEL 1123


Valve size: DN 350 with gear box

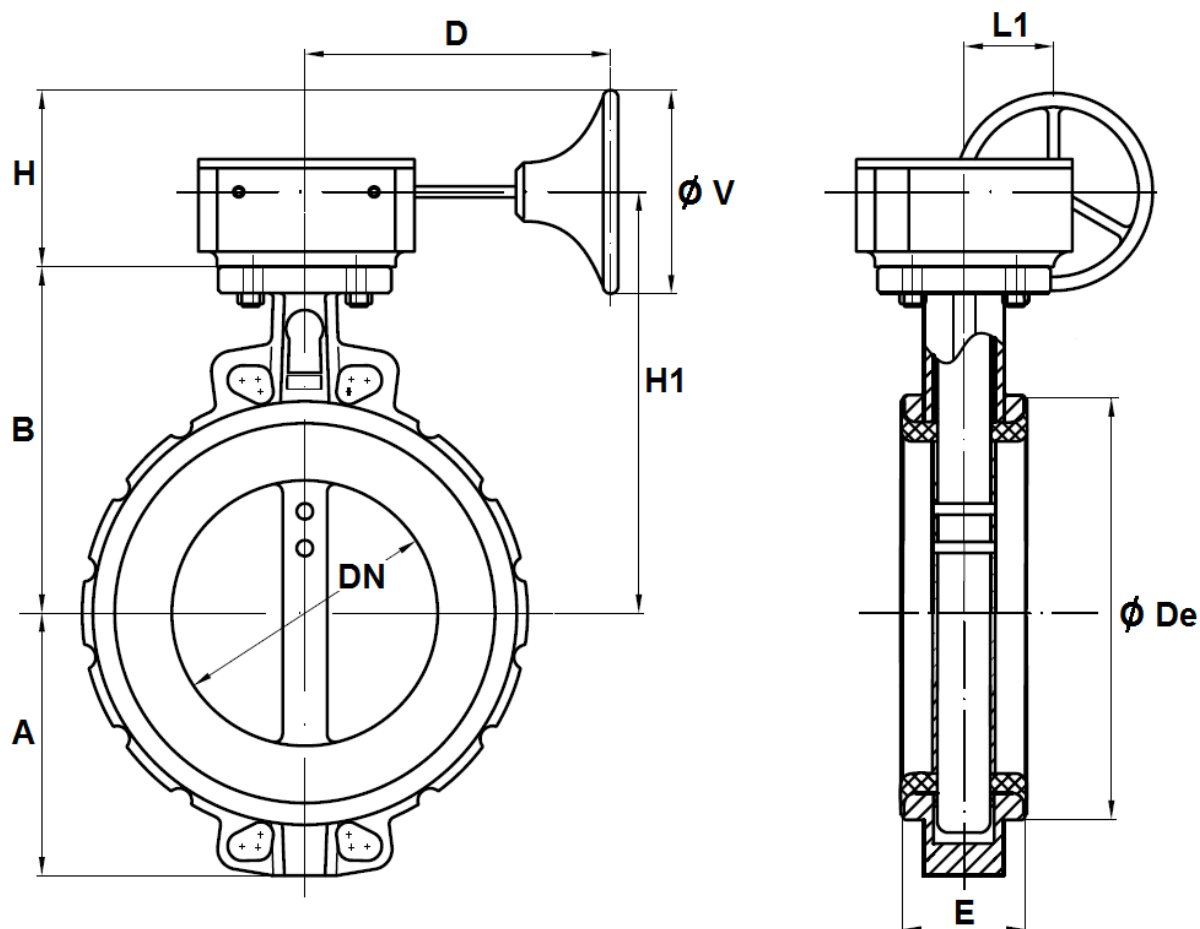

Ref.	DN	350
1123	A	260
	B	334
	D	223
	Ř De	418
	E	78
	H	190
	H1	379
	L1	78
	Ř V	300
	Weight (Kg)	54.5

# WAFER BUTTERFLY VALVE MODEL 1123


Valve size: DN 400 - 600 with gear box

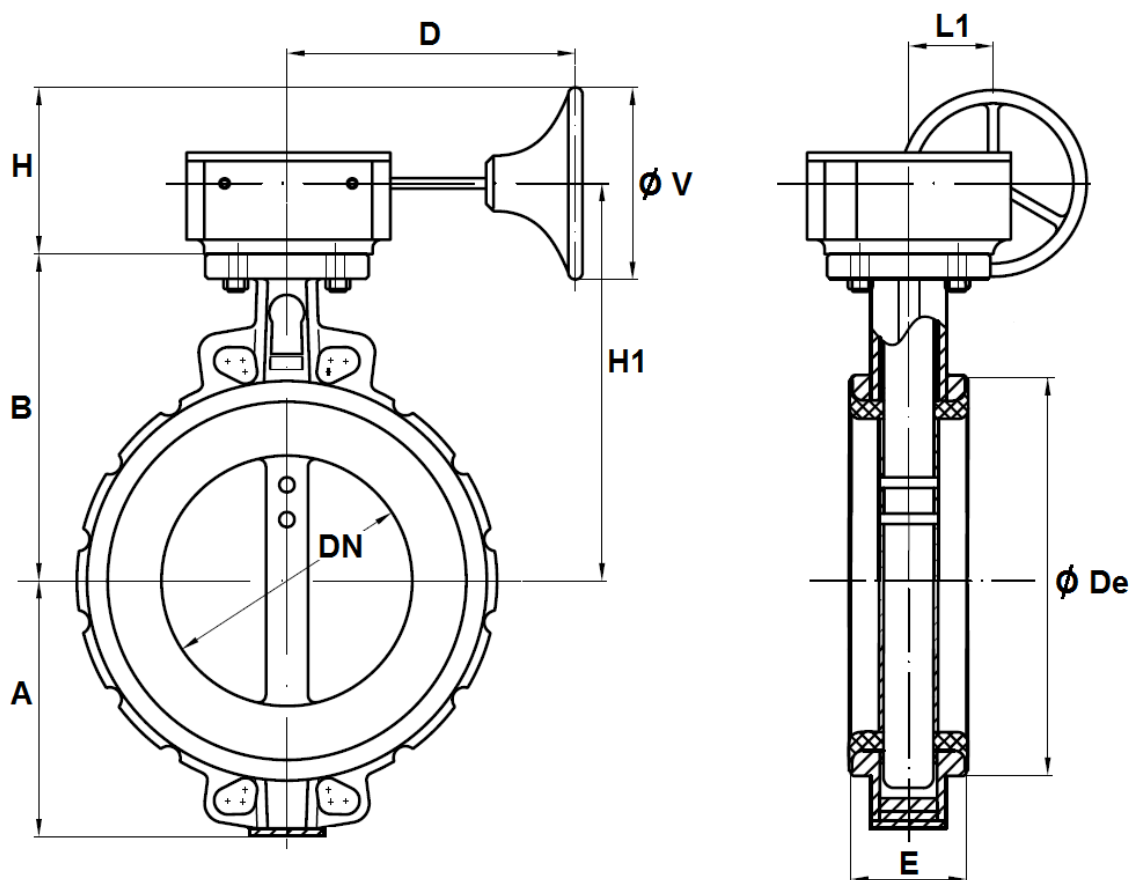

Ref.	DN	400	450	500	600
1123	A	307	339	368	459
	B	361	401	480	565
	D	270	270	339	339
	Ř De	470	525	570	697
	E	102	114	127	154
	H	208	258	222	222
	H1	423	463	545	630
	L1	120	120	120	120
	Ř V	400	400	300	300
	Weight (Kg)	89.85	107.4	155.8	231.1

# WAFER BUTTERFLY VALVE MODEL 1123


Valve size: DN 700 - 1200 with gear box

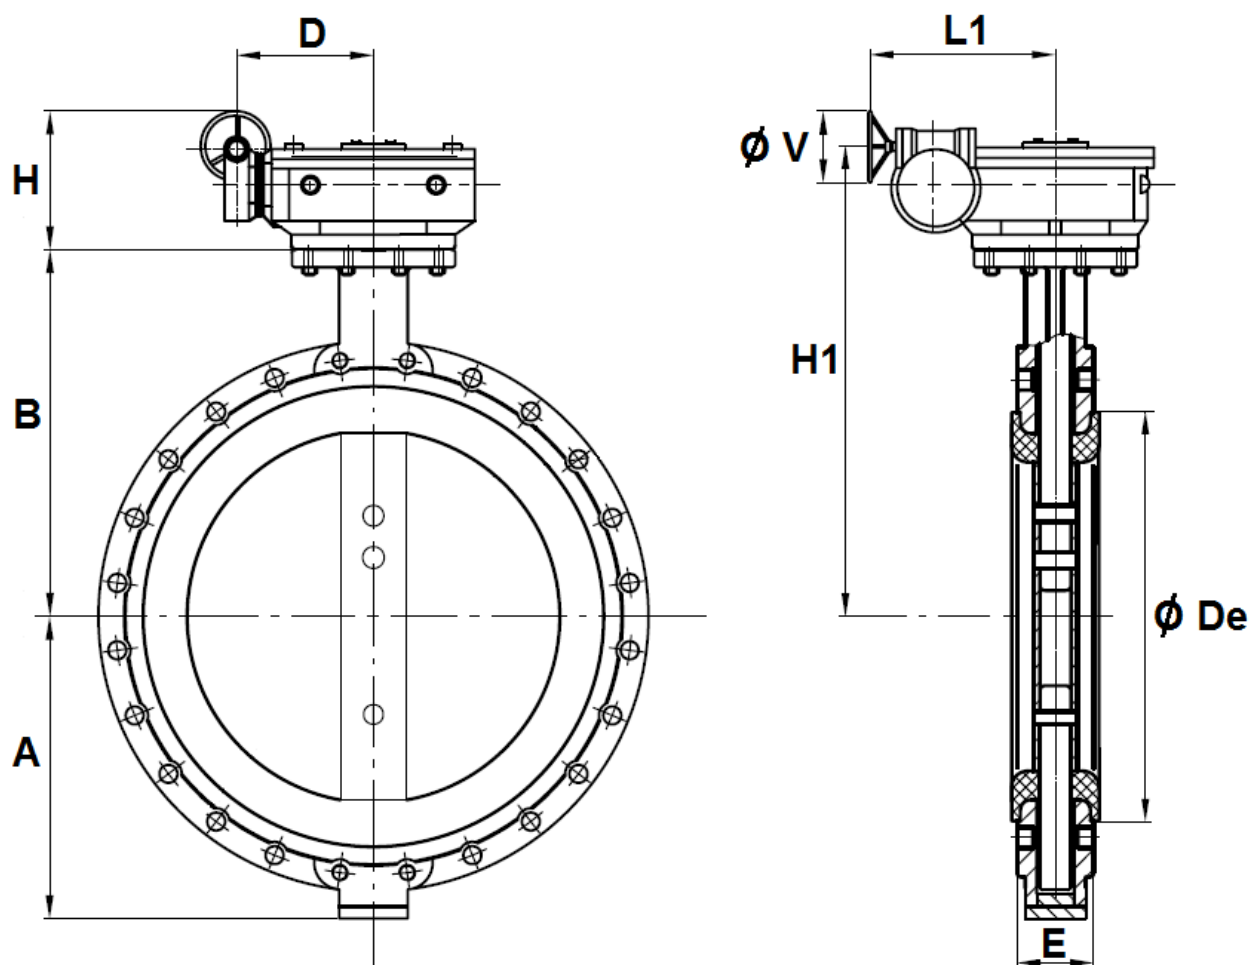

Ref.	DN	700	800	900	1000	1200
1123	A	520	591	656	721	860
	B	624	672	720	800	941
	D	367	367	410	410	500
	Ř De	800	906	1015	1134	1331
	E	163	188	203	216	276
	H	382	382	476	476	528
	H1	725	785	944	994	1228
	L1	243	243	278	278	458
	Ř V	400	400	450	450	450
	Weight (Kg)		372	456	831	982

# WAFER BUTTERFLY VALVE MODEL 1123


Gear box size DN 32/40 - 300

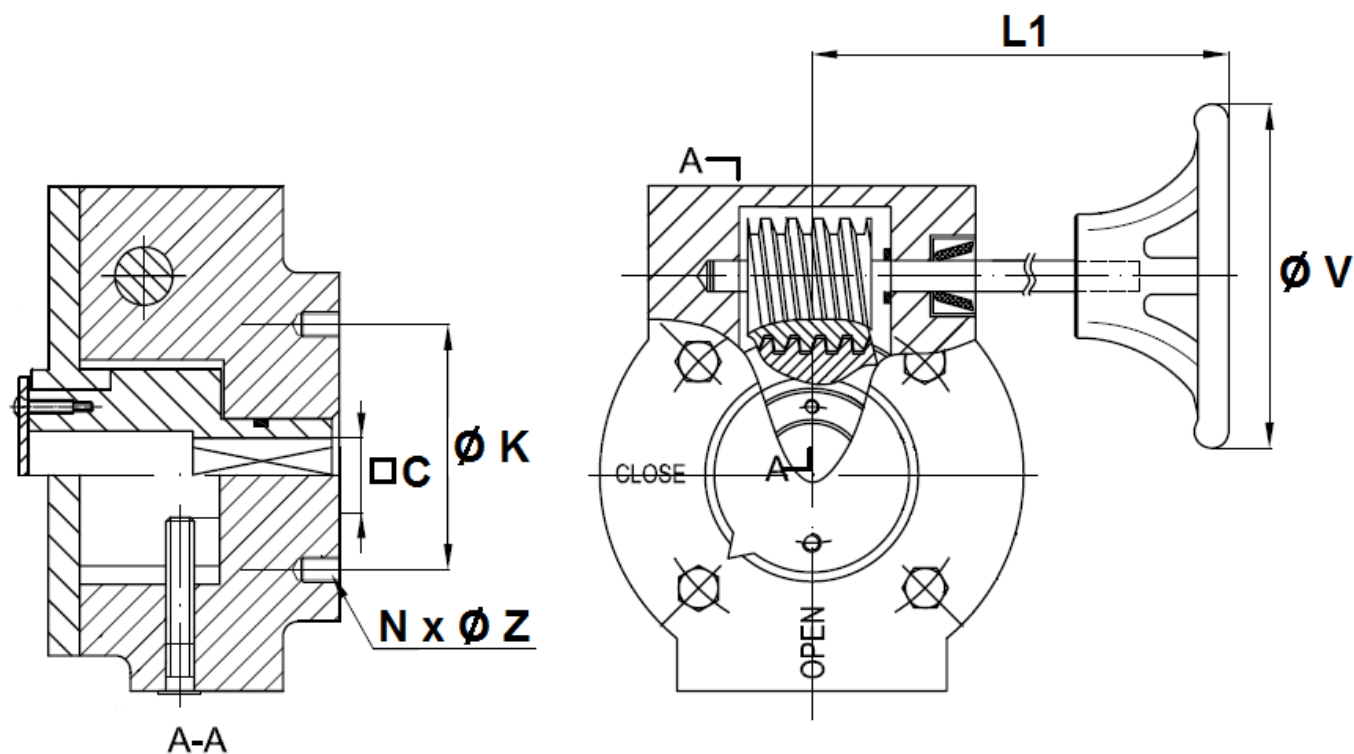

DN	32/80	100	125/150	200	250	300
C	9	11	4	17	2	27
Ř K	50	50	70	102	125	125
ISO	F05	F05	F07	F10	F12	F12
N x Ř Z	4 x M6	4 x M6	4 x M8	4 x M10	4 x M12	4 x M12
L1	156	156	156	241	223	223
Ř V	150	150	250	300	300	300
Weight (kg)	3.51	4.22	3.53	6.99	7.42	9.6
Ref.	1198001	1198002	1198003	1198004	1198005	1198006

# WAFER BUTTERFLY VALVE MODEL 1123


Disk and neck size:

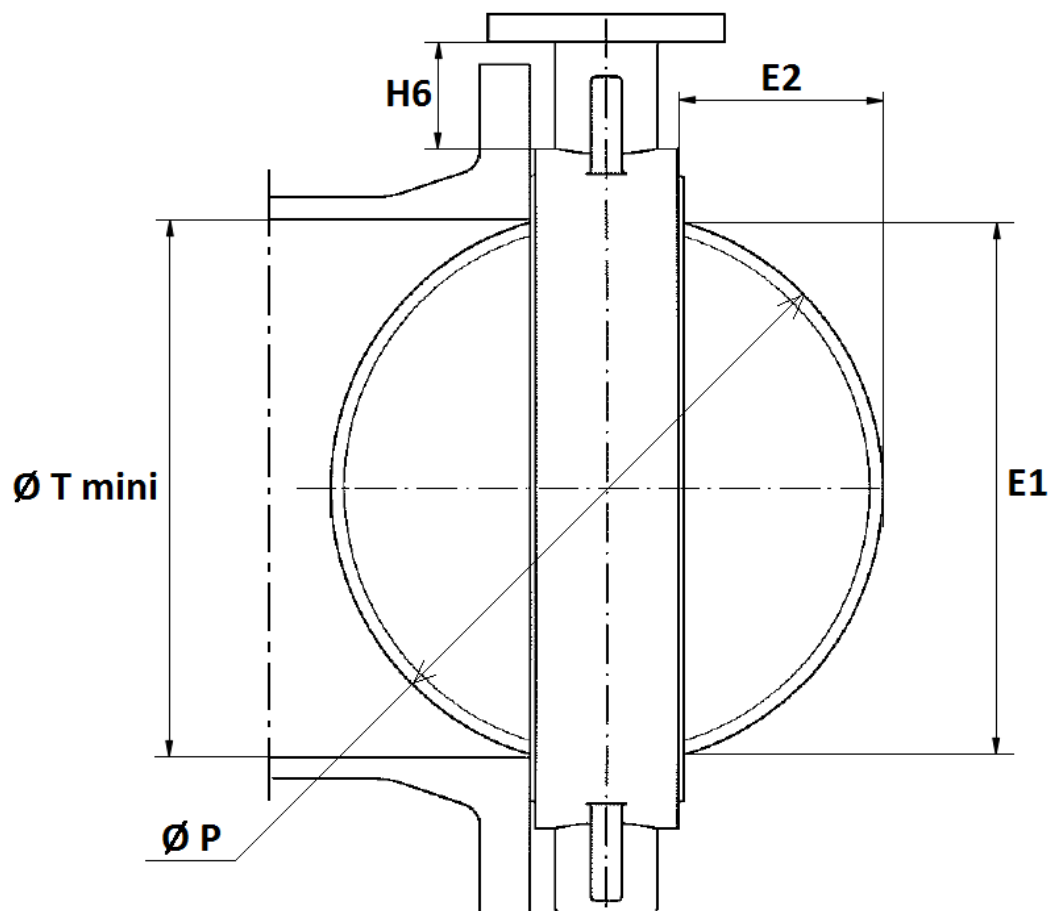

DN	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600
E1	37.7	47.06	59.81	75.56	98.37	117.02	147.65	195.3	242.5	292.6	325.4	379.8	429	480.2	580.5
E2	4.9 5		9.4	16.5	26.1	33.9	49.7	71.2	91.2	111.8	127.8	143.9	163.3	182.3	219.3
H6 ±2	76.7 7	9	79	87.5	92.3	90.3	99.2	99.5	103.8	105.8	105.8	109.5	113	172	192
Ř P	42.8 5	3	64.8	79.1	104.25	123.8	155.4	202.4	250.5	301.6	333.7	389.8	440.7	491.8	592.7
Ř T mini	43 5	3	65	79.5	104.5	124	155.5	202.5	250.5	302	334	390	441	492	593

# WAFER BUTTERFLY VALVE MODEL 1123

ISO mounting pad size DN 32 - 600

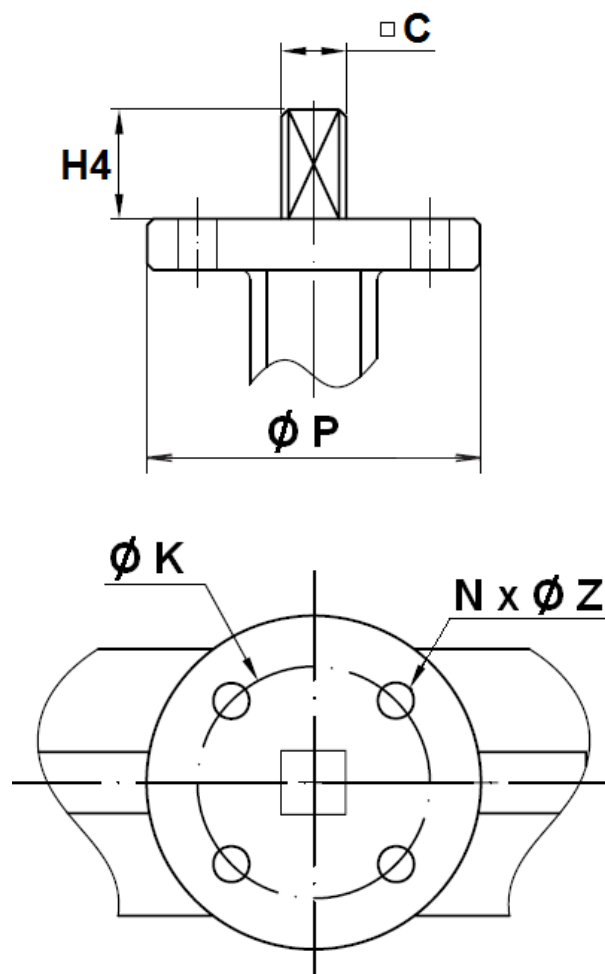


DN	32/40	50	65	80	100	125	150	200	250	300	350	400	450	500	600
C	9	9	9	9	11 1	4	14 1	7	22 2	7	27 2	7	30 3	6	46
Ř K	50 5	0	50 5	0	50 7	0	70	102	125	125	125	125	165	165	165
ISO	F05	F05	F05	F05	F05	F07	F07 F	10 F	12 F	12 F	12 F	12 F	16 F	16 F	16
Nx ŘZ	4 x 7	4 x 7	4 x 7	4 x 7	4 x 7	4 x 9	4 x 9	4 x 11	4 x 13	4 x 13	4 x 14	4 x 14	4 x 22	4 x 22	4 x 22
H4 3	2	32 3	2	32 3	2	42 4	2	36 3	8	38 4	5	50 5	0	65	70
Ř P	65 6	5	65 6	5	65 9	0	90	125	150	150	150	150	210	210	300



# WAFER BUTTERFLY VALVE MODEL 1123

ISO mounting pad size DN 700 - 1200

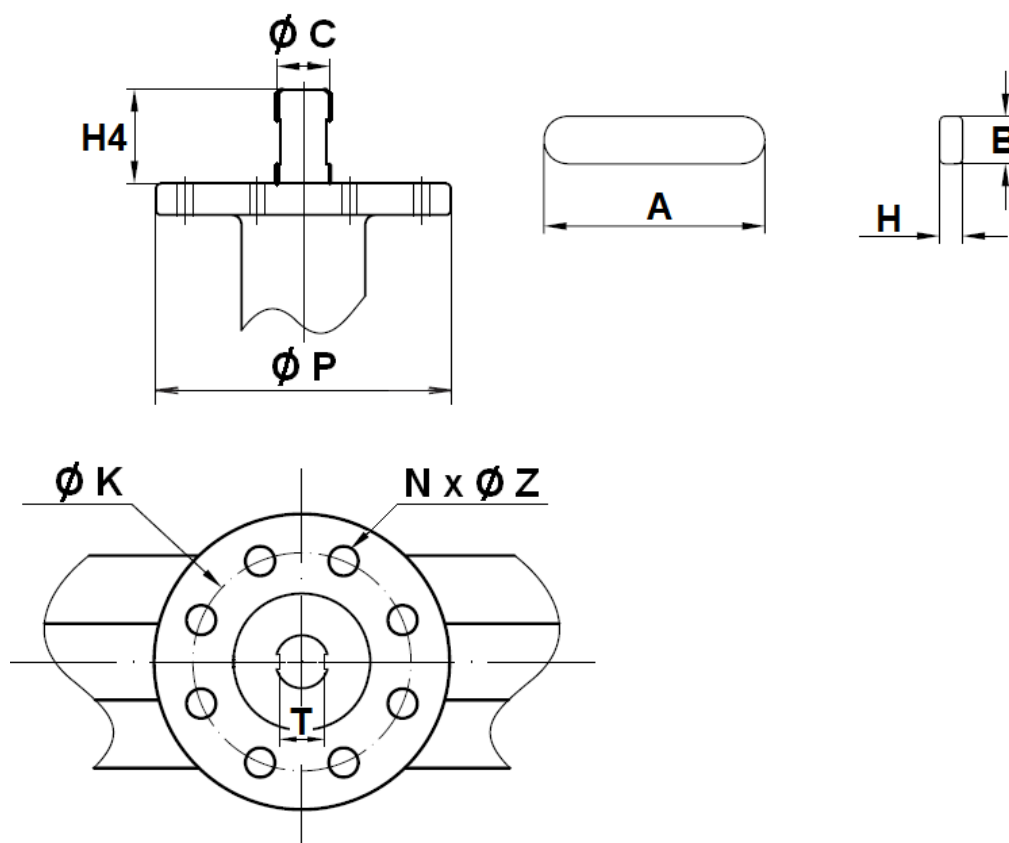

DN	700	800	900	1000	1200
Ř C	63.35	63.35	75.8	5	105
Ř K	254	254	254	254	298
ISO	F25	F25 F	25	F25 F	30
N x Ř Z	8 x 18	8 x 18	8 x 18	8 x 18	8 x 22
H4 8	0	80	118	142	150
Ř P	300	300	300	300	350
A	60.6	0	100	110	110
B	18.1	8	20.2	2	28
H	11.1	1	12.1	4	16

# WAFER BUTTERFLY VALVE MODEL 1123

## Gear box specifications

DN	32/80	100	125/150	200	250	300
Ref.	1198001	1198002	1198003	1198004	1198005	1198006
Ratio factor	24 :1	24 :1	24 :1	30 :1	30 :1	50 :1
Input torque (Nm) 1	8	18 1	8	58 5	8	60
Output torque (Nm)	170	170	170	700	700	1200

DN	350	400	450	500	600	700	800	900	1000	1200
Ratio factor	50 :1	80 :1	80 :1	260 :1	300 :1	704 :1	704 :1	832 :1	832 :1	1056 :1
Input torque (Nm) 6	0	78 7	8	30 4	5	95 9	5	178	178	260
Output torque (Nm)	1200	2500	2500	2500	4000	8000	8000	15000	15000	25000

## STANDARDS :

- Fabrication according to ISO 9001 :2008
- Designing according to API 609
- DIRECTIVE 97/23/CE : CE N° 0035 (Risk category III module H)
- Pressure tests according to API 598, table 6
- Length according to ISO 5752 series 20, EN 558 series 20 ( NF 29305 )
- ISO 5211 mounting pad
- Between flanges according to EN 1092-1 PN10/16 and ASME B16.5 Class 150 (PN20)


# WAFER BUTTERFLY VALVE MODEL 1123

## GENERAL GUIDELINES:


- Ensure that the valves to be used are appropriate for the conditions of the installation (type of fluid, pressure and temperature).
- Be sure to have enough valves to be able to isolate the sections of piping as well as the appropriate equipment for maintenance and repair.
- Ensure that the valves to be installed are of correct strength to be able to support the capacity of their usage.
- Installation of all circuits should ensure that their function can be automatically tested on a regular basis (at least two times a year).

## INSTALLATION INSTRUCTIONS:


- Before installing the valves, clean and remove any objects from the pipes (in particular bits of sealing and metal) which could obstruct and block the valves.
- Ensure that both connecting pipes either side of the valve (upstream and downstream) are aligned (if they're not, the valves may not work correctly).
- Make sure that the two sections of the pipe (upstream and downstream) match, the valve unit will not absorb any gaps. Any distortions in the pipes may affect the tightness of the connection, the working of the valve and can even cause a rupture.  
To be sure, place the kit in position to ensure the assembling will work.
- If sections of piping do not have their final support in place, they should be temporarily fixed. This is to avoid unnecessary strain on the valve.
- The valve must be inserted between flanges with disc half opened but the disc must not overpass the valve thickness. Position the bolts to keep centered the valve.  
Then open fully the valve and tighten the bolts. See graph under.



Half open valve introduction



Complete opened disc valves when screw tightening



- Tighten the bolts in cross.
- The disc must move easily inside the pipe.
- Valves must be opened during cleaning operation.
- Tests must be done with a cleaned pipe.
- Tests must be done with opened valve.
- Test pressure must not be higher than the valve specification according to API 598.
- Then open slowly the valve.
- Do not mount butterfly valves with stainless steel pressed collars and turning flanges without strias.
- And not on flat face flanges without strias (example : painted cast iron fittings).

## MAINTENANCE :

- We recommend to operate fully the valve 1 to 2 times per year.
- During maintenance operation, ensure that the pipe isn't under pressure, that there's no fluid in the pipe and that the valve is isolated. If there's a fluid in the pipe, evacuate it. Ensure that there are no risks due to the temperature or the fluid (like acids).  
If the fluid is corrosive, inert the installation before maintenance operation.