


FW12 STAINLESS STEEL DOUBLE-WINDOW SIGHT GLASS WITH ROTOR

FEATURES

The FW-12 sight glass is designed for the visual inspection of flow for fluids inside piping. Made of 316 stainless steel with an ABS rotor, it is especially designed for process fluids. The double-window type FW-12 provides particularly easy visibility.

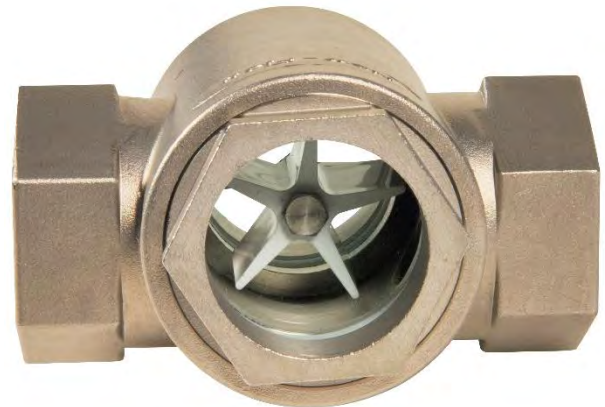


AVAILABLE MODELS

DN 15 to DN 50.
G threaded connection.

LIMITS OF USE

Fluid WP:	10 bar
Fluid WT°:	- 10 °C / + 70 °C

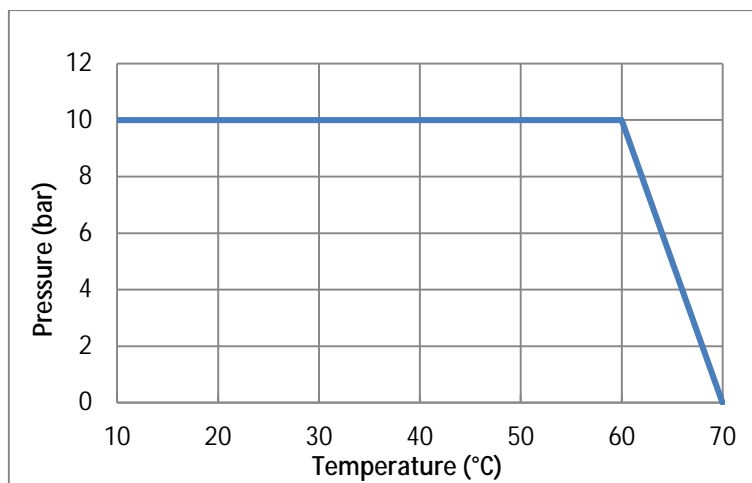

DIRECTIVES AND MANUFACTURING STANDARDS

OBJECT	Standard	ON	OBJECT	Standard
Pressure Equipment Directive 97/23/EC	DN 15 and 25: not subject	1128	Stainless steel grades	EN 1503-1
	DN 32 to 50 : category I		Size	EN 12516-4
G thread	ISO 228		Material certificate	EN 10204 § 3.1

Information given as an indication only, and subject to possible modifications.

