

STAINLESS STEEL PRESSURE GAUGE WITH DRY DIAL Ø 100



- Size :** Diameter 100
Ends : Male BSP
Min Temperature : + 0°C (Ambient -20°C)
Max Temperature : + 100°C (Ambient +60°C)
Pressure : From -1 to 60 Bars
Specifications : All stainless steel
Stainless steel mechanism
Dry dial (to be fitted in)
Safety glass

Materials : SS 304

STAINLESS STEEL PRESSURE GAUGE WITH DRY DIAL Ø 100

SPECIFICATIONS :

All stainless steel
Stainless steel mechanism
Dry dial (to be fitted in)
Safety glass
1 class
Protection IP65
Bottom connection BSP threaded
With vent security

USE :

Not for viscous or crystallizing liquid
Min and max Temperature Ts : 0°C to +100°C (ambience -20°C à + 60°C)

RANGE :

All stainless steel pressure gauge with dry dial Ø 100 with bottom BSP 1/2" male connection, range -1/+1 to 0/60 bars **Ref. 1617**

ACCESSORIES :



SS curl PN20 Male / Female BSP
○ DN 1/2" **Ref. 9880208**



250 ml glycerine bottle **Ref. 9880401**

STAINLESS STEEL PRESSURE GAUGE WITH DRY DIAL Ø 100
GRADUATIONS :


| Range (bar) | Graduation (bar) |
|-------------|------------------|
| -1 / +1 | 0,05 |
| 0 / 1,6 | 0.02 |
| 0 / 2,5 | 0.05 |
| 0 / 4 | 0,1 |
| 0 / 6 | 0,1 |
| 0 / 10 | 0,2 |
| 0 / 16 | 0,2 |
| 0 / 25 | 0,5 |
| 0 / 40 | 1 |
| 0 / 60 | 1 |

MATERIALS :

| DESIGNATION | MATERIALS |
|-------------|--------------|
| Box | SS 304 |
| Fitting | SS 316 |
| Mechanism | SS 316 |
| Dial | Aluminium |
| Glass | Safety glass |
| Needle | Aluminium |

STAINLESS STEEL PRESSURE GAUGE WITH DRY DIAL Ø 100

SIZE (in mm) :

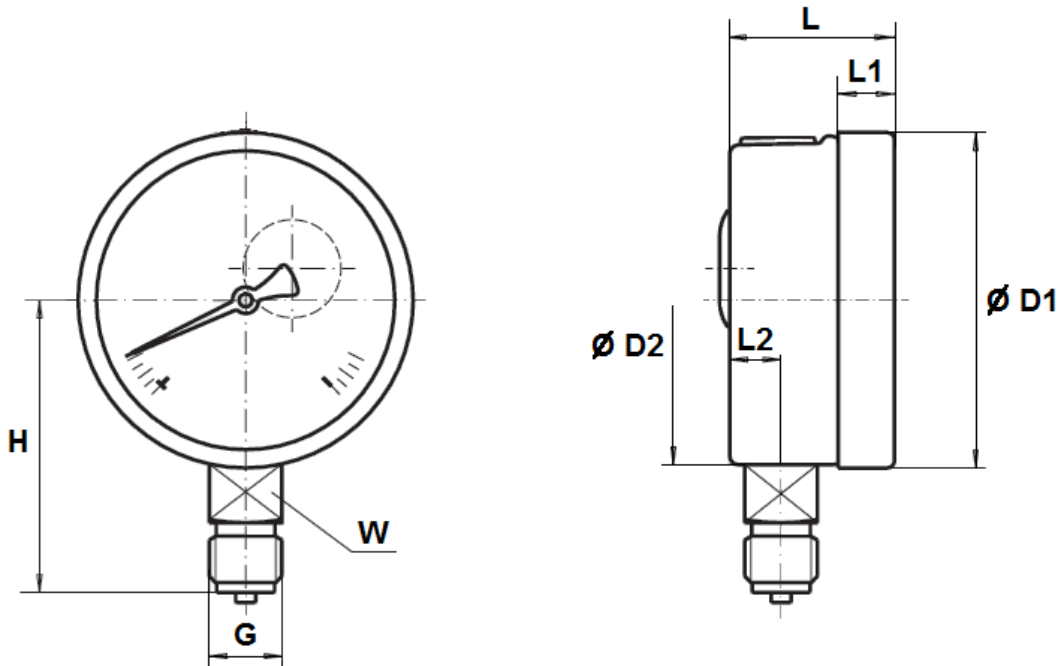

| DN | 100 |
|---------------|----------|
| Ø D1 | 100.8 |
| Ø D2 | 99 |
| H | 90 |
| G | 1/2" BSP |
| L | 48 |
| L1 | 14 |
| L2 | 16 |
| W | 22 |
| Weight (Kg) | 0.500 |

STAINLESS STEEL PRESSURE GAUGE WITH DRY DIAL Ø 100

STANDARDS :

Fabrication according to ISO 9001 : 2008

Designing according to EN 837-1

DIRECTIVE 97/23/CE : Products excluded from directive (article 3, § 3)

Threaded male BSP cylindrical ends according to ISO 228-1

ADVICE : Our opinion and our advice are not guaranteed and SFERACO shall not be liable for the consequences of damages.
The customer must check the right choice of the products with the real service conditions.