


# ROTARY HEAD 2814-O SERIES

Tanks and cisterns washing system



360°

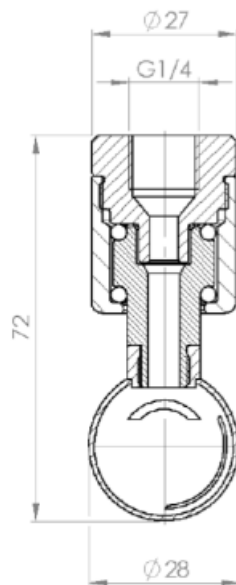

SERIES 2814-O - GAS THREAD (BSP)						
	Flow Rate (lt/h)			Angle	Max washing range**	Joints
Pressure (Bar)	0,5	1	2	(Degrees)	(meters)	Fem.
Code						
2814-O	1072	1396	1694	360°	1,1 ÷ 2,3	1/4"G

## ROTARY HEAD 24 SERIES

Tanks and cisterns washing system

### Construction:

The rotary spray heads are made of AISI316L stainless steel and are mounted onto two bearings. All internal surfaces are carved with high precision machine tools, which provide a smooth polishing and high quality surfaces. The heads are available with different joint solutions: female gas thread (BSP), clip or socket welding.



### Operation:

The fluid Flow Rateing through the rotary head produces the rotation. Its speed varies depending on the washing fluid pressure that needs to be limited. An excessive speed in the rotation breaks the Flow Rate into drops, reducing the impact strength.

### Technical characteristics:

Max working temperature 95°C – Min working temperature 0°C

The weight of the rotary head series 24 can vary from 0.15 to 0.25 kg depending on the model.