


Nátrubek s vnitřním závitem NPT

provedení dle ANSI B 16.11, materiál dle ASTM-A 182, NPT závit ANSI B1.20.1

materiál: AISI 304/L nebo AISI 316/L

A023F



NPT Threaded - Full coupling


objednací kód materiál AISI 304L	objednací kód materiál AISI 316L	DN	W	D	B	L min	Kg
A023F-006-304L	A023F-006-316L	1/8"	32	16	6,4	6,7	0,03
A023F-008-304L	A023F-008-316L	1/4"	35	19	8,1	10,2	0,05
A023F-010-304L	A023F-010-316L	3/8"	38	22	9,1	10,4	0,06
A023F-015-304L	A023F-015-316L	1/2"	48	28	10,9	13,6	0,14
A023F-020-304L	A023F-020-316L	3/4"	51	35	12,7	13,9	0,20
A023F-025-304L	A023F-025-316L	1"	60	44	14,7	17,3	0,40
A023F-032-304L	A023F-032-316L	1 1/4"	67	57	17,0	18	0,70
A023F-040-304L	A023F-040-316L	1 1/2"	79	64	17,8	18,4	1,00
A023F-050-304L	A023F-050-316L	2"	86	76	19,0	19,2	1,90

Nátrubek s vnitřním závitem NPT - krátký

provedení dle ANSI B 16.11, materiál dle ASTM-A 182, NPT závit ANSI B1.20.1

materiál: AISI 304/L nebo AISI 316/L

A023H

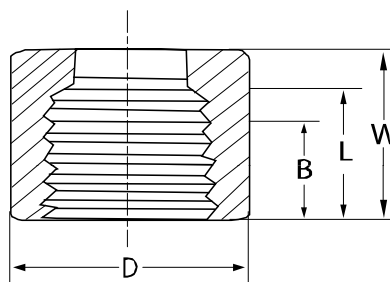

NPT Threaded - Half coupling

objednací kód materiál AISI 304L	objednací kód materiál AISI 316L	DN	W	D	B	L min	Kg
A023H-006-304L	A023H-006-316L	1/8"	16	16	6,4	6,7	0,02
A023H-008-304L	A023H-008-316L	1/4"	17,5	19	8,1	10,2	0,03
A023H-010-304L	A023H-010-316L	3/8"	19	22	9,1	10,4	0,05
A023H-015-304L	A023H-015-316L	1/2"	24	28	10,9	13,6	0,07
A023H-020-304L	A023H-020-316L	3/4"	25,5	35	12,7	13,9	0,10
A023H-025-304L	A023H-025-316L	1"	30	44	14,7	17,3	0,20
A023H-032-304L	A023H-032-316L	1 1/4"	33,5	57	17,0	18	0,32
A023H-040-304L	A023H-040-316L	1 1/2"	39,5	64	17,8	18,4	0,50
A023H-050-304L	A023H-050-316L	2"	43	76	19,0	19,2	0,95